


ConFibe®

Hooked End Steel Fibre
CFMT 100/60 (1.0mm)

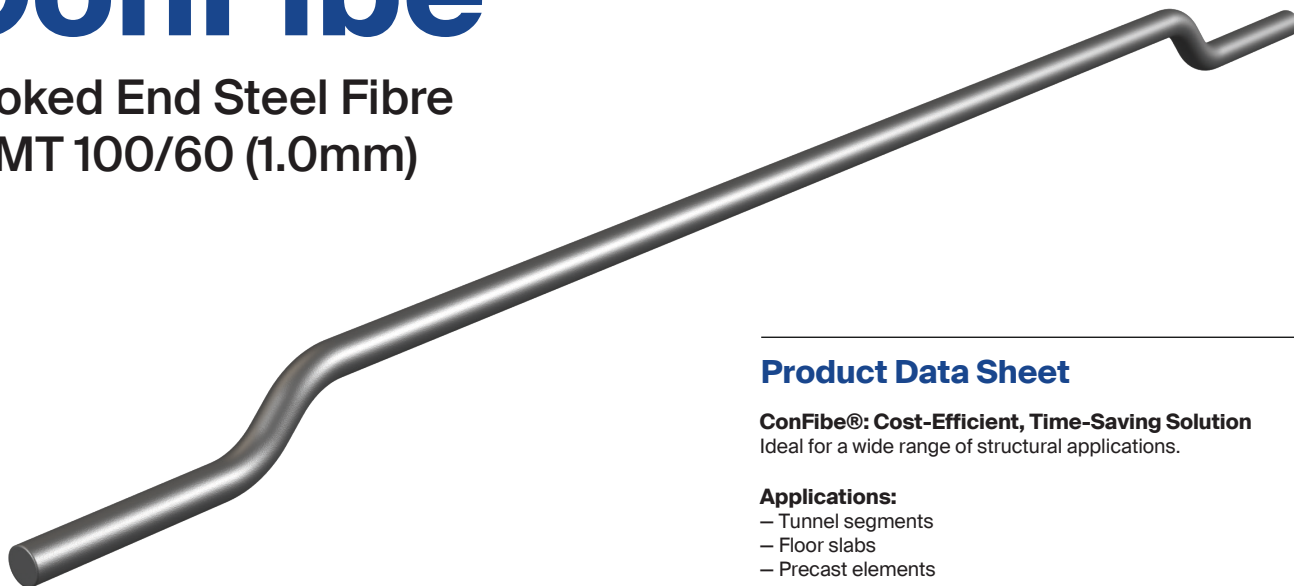

Product Data Sheet

ConFibe®: Cost-Efficient, Time-Saving Solution
Ideal for a wide range of structural applications.

Applications:

- Tunnel segments
- Floor slabs
- Precast elements


Key Benefits:

- Accelerated construction timelines
- Reduced labor requirements
- Lower steel and concrete usage
- Enhanced durability

Comprehensive Support by Continental Steel:


- Customised guidance for project specifications and requirements
- Expertise in selecting fibre types and calculating dosage rates
- Assistance with concrete mix design.

For any enquiries, contact us at sales@consteel.com.sg

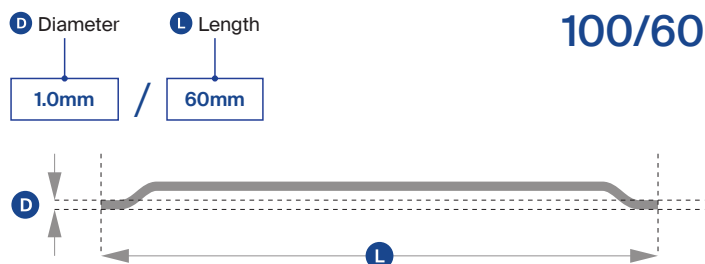


Diameter	1.0mm
Length	60mm
Aspect Ratio	(L/D): 60
Tensile Strength	1,500 MPa
Number of fibres per kg	2,600


Packaging Options



20kg
Standard Bag
Nett weight 20kg



50 x 20kg
Standard Bag/Pallet
Nett weight 1000kg



2 x 500kg
Big Bag/Pallet
Nett weight 1000kg

Safety and Storage



Certification

Continental Steel is ISO9001, ISO45001 and ISO14001 certified and awarded BizSafe Star, the highest safety award ranking in Singapore.



Product Certificates

ConFibe is certified for structural use according to EN 14889-1. Detailed information is available on request.



EN 14889-1
type 1